


FILTER FAN INSTALLATION

1. USING "CUTOUT" TEMPLATE LOCATE TWO CUTOUTS.

2. REMOVE THUMB SCREWS, COVER, AND FILTER.

3. INSTALL FAN PLATE AND OPPOSING FILTER PLATE WITH 4 EACH OF THE PROVIDED #10-32 SCREWS AND LOCKING NUTS. SCREW HEAD SHOULD BE ON THE PLATE SIDE WITH NUTS INSIDE ENCLOSURE.

4. REPLACE FILTERS, COVERS AND THUMB SCREWS.

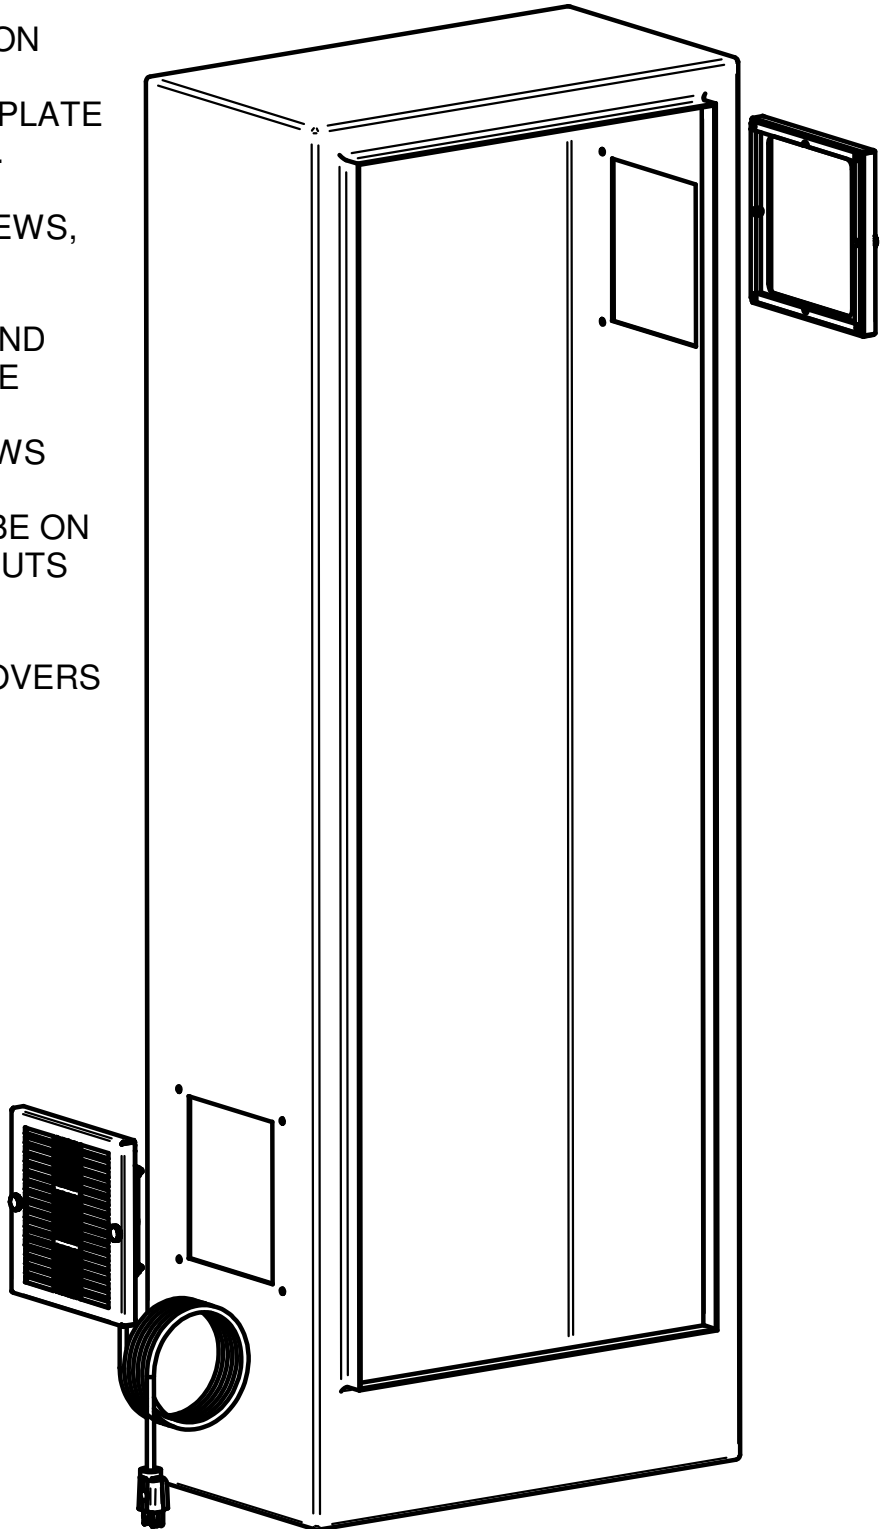

TITLE		
FFP INSTALLATION INSTRUCTIONS METAL FILTER FAN PACKAGES		
SIZE	DWG NO	REV
A	FFP INSTALLATION	
FILE NAME: FFP Installation.dft		
SCALE:	WEIGHT:	SHEET 1 OF 1