


CSK 060

PTC HEATERS | 10 W, 20 W
TOUCH-SAFE PTC HEATER

The CSK 060 is a touch-safe heater for use in enclosures. The design of the heater utilizes natural convection which results in a circulating current of warm air. The surface temperatures on the accessible side surfaces of the housing are minimized as a result of the heater design. This heater is suitable for permanent operation.

Operating Voltage*	AC/DC 120-240 V (min. 110 V, max. 265 V)
Heating Element	PTC resistor, temperature limiting
Surface Temperature	< 185 °F (85 °C), except upper protective grill
Connection	2-pole terminal AWG 14 max (2.5 mm ²), torque 0.8 Nm max.
Housing	plastic, UL 94V-0, black
Mounting	clip for 35 mm DIN rail, EN 60715
Mounting Position	vertical airflow (air outlet up, connection on bottom)
Operating / Storage Temperature	-49 to +158 °F (-45 to +70 °C)
Operating / Storage Humidity	max. 90 %RH (non-condensing)
Protection Class / Type	II (double insulated) / IP20
Approvals	UL File No. E150057 / VDE / EAC

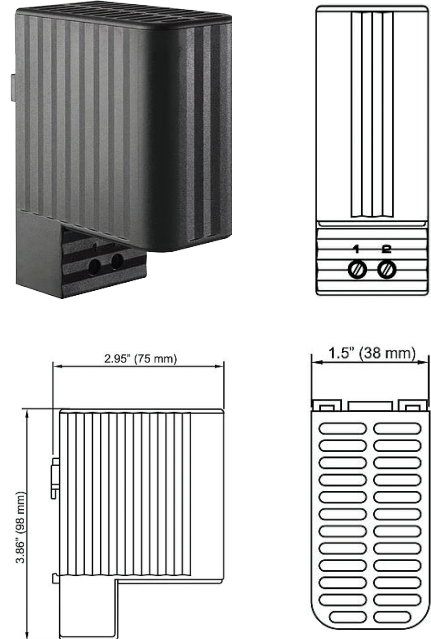

Dimensioned Drawings.

- Low surface temperature
- Compact size
- Wide voltage range
- Double insulated protection
- DIN rail mountable

*Operating high voltage heaters below AC/DC 140 V reduces heating performance by approx. 10%



Part No.	Heating Capacity*	Dimensions	Max. Current (Inrush)	Rec. Pre-Fuse T (Time-Delay)	Weight (Approx.)
06030.0-00	20 W	3.86 x 2.95 x 1.5"	2.5 A	4.0 A	6.1 oz. (170 g)
06040.0-00	10 W	3.86 x 2.95 x 1.5"	1.0 A	2.0 A	5.0 oz. (140 g)

*at 68 °F (20 °C) ambient temperature