


DCR 030

FAN HEATERS | 200 W TO 800 W
24 VDC, 56 VDC

The compact high performance fan heater DCR 030 prevents formation of condensation and frost and provides an evenly distributed interior air temperature in enclosures with electric/electronic components. The fan heater is available with an integrated electronic thermostat or integrated electronic hygrosstat. The model with thermostat is available with internal or external sensor. The fan heater with integrated hygrosstat is equipped with an external sensor. The external sensor can be positioned freely anywhere in the enclosure for precise measurements of temperature and humidity. The DCR 030 was designed as a stationary unit for the bottom of the enclosure. For wall fixing the fan heater DCR 130 is recommended.

Heating Element	high performance cartridge
Overheat Protection	with automatic reset and second-tier one shot fuse to protect against overheating in case of fan failure
Heater Body	extruded aluminium profile
Axial Fan, Ball Bearing	service life 50,000 h at +77 °F (+25 °C)
Air Flow, Free Blowing	94 cfm (160 m³/h)
Connection	2-pole "Push-In" connection clamp stranded wire* AWG 16 (1.5 mm²) with strain relief; max. AWG 12 (2.5 mm²)
Housing	plastic, UL 94V-0, black
Mounting	M5 screws and washers (not included), torque 2 Nm max.
Mounting Position	vertical airflow (air outlet up)
Operating Temperature	-4 to +167 °F (-20 to +75 °C)
Operating / Storage Humidity	max. 90 %RH (non-condensing)
Dimensions	3.9 x 5.7 x 6.5" (100 x 145 x 166 mm)
Weight	approx. 2.86 lbs. (1.3 kg)
Protection Class / Type	IP20 / II (double insulated)
Approvals	UL File No. E234324 / VDE / EAC

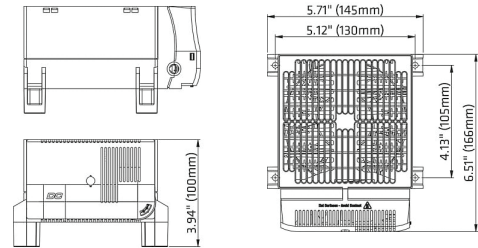

Dimensioned Drawings.

- High DC heating performance
- Integrated adjustable thermostat or hygrosstat
- Small hysteresis
- Integrated switch module
- Screw mounting
- Optical indicator (LED)

*When connecting with stranded wires, wire end ferrules must be used.



Part No.	Model	Operating Voltage	Heating Capacity	Rec. Pre-fuse T (time-delay)	Setting Range† (temperature/humidity)
03092.1-16	Fan heater with integrated thermostat with internal temperature sensor	DC 24 V	200 W	16.0 A	-4 to 104 °F
03092.1-17	Fan heater with integrated thermostat with connector for external temperature sensor***	DC 24 V	200 W	16.0 A	-4 to 104 °F
03097.3-16	Fan heater with integrated thermostat with internal temperature sensor	DC 56 V	800 W	20.0 A	-4 to 104 °F
03097.3-17	Fan heater with integrated thermostat with connector for external temperature sensor**	DC 56 V	800 W	20.0 A	-4 to 104 °F
03092.1-03	Fan heater with integrated hygrosstat with connector for external humidity sensor**	DC 24 V	200 W	16.0 A	40 to 90 % RH
03095.3-03	Fan heater with integrated hygrosstat with connector for external humidity sensor**	DC 56 V	600 W	20.0 A	40 to 90 % RH

**The external sensor needs to be ordered separately; † Switching difference temperature: 3 K (±1 K tolerance) at +77 °F (+25 °C), 50 % RH; switching difference humidity: 4 % RH (±1 % tolerance) at +77 °F (+25 °C), 50 % RH.