


THERMOSTATS | SMALL THERMOSTAT

The mechanical thermostats KTO 111 and KTS 111 are two state regulators for use up to 5,000 meters in altitude, thanks to optimized air gap and increased creepage distance. By use of Push-In terminals the thermostat is wired tool-free. The Push-In terminals provide constant pressure on the wires to prevent them from coming loose (e.g. during transport).

KTS 111: Thermostat (NO); contact maker for regulating of filter fans and heat exchangers or for switching signal devices when temperature limit has been exceeded. The contact closes when temperature is rising.

KTO 111: Thermostat (NC); contact breaker for regulating heaters. The contact opens when temperature is rising.

Switch Temperature Difference	7 K (± 4 K tolerance)
Sensor Element	thermostatic bimetal
Contact Type	snap-action contact
Service Life	100,000 cycles verified
Max. Operating Voltage, Frequency Range	AC 250 V, 50-60 Hz
Max. Inrush Current	AC 16 A for 10 sec.
Connection*	2 Push-In clamps rigid wire 2.5 mm ² (AWG 14) stranded wire 1.5 mm ² (AWG 16)
Mounting	clip for 35 mm DIN rail, EN 60715
Casing	plastic according to UL94 V-0, light grey
Dimensions	60 x 33 x 41 mm
Weight	approx. 40 g
Fitting Position	variable
Operating/Storage Temperature	-45 to +80 °C (-49 to +176 °F)
Operating/Storage Humidity	max. 90 % RH (non-condensing)
Protection Type/Protection Class	IP20 / II
Overvoltage Category/Altitude	II: up to 5,000 m; III: up to 2,000 m
Approvals	UL File No. E164102 / VDE / EAC

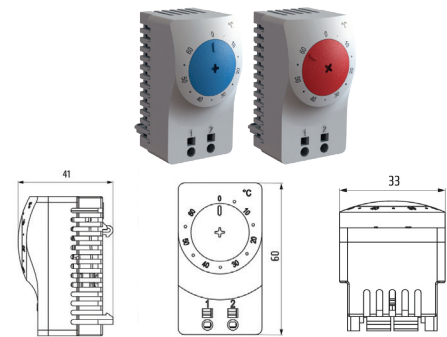

Dimensioned Drawings


- Safe wiring with Push-In connection terminal
- Faster and tool-free wiring
- Improved air intakes for ventilation
- Easy adjustability of switch temperature setting
- For use in up to 16,000 ft. altitude



*Stripped length of rigid wire: 10 to 12 mm. When connecting with wires, wire end ferrules must be used (square or trapezoid crimp).

Length of wire end ferrule: 10 mm or 12 mm.

IMPORTANT NOTE: The contact system of the regulator is subjected to environmental influences, thus the contact resistance may change. This can lead to a voltage drop and/or self-heating of the contacts.

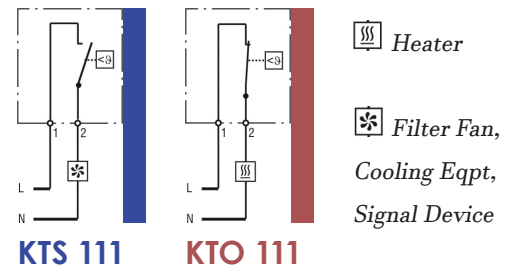

Setting Range	Part No. (NC)	Part No. (NO)	Switching Current**/Capacity Max		
			AC 250 V	AC 120 V	DC 24-72 V
+32 to +140 °F	11100.9-00	11101.9-00	10 (2) A	15 (2) A	30 W
+14 to +122 °F	11100.9-01	11101.9-01	10 (2) A	15 (2) A	30 W
0 to +60 °C	11100.0-00	11101.0-00	10 (2) A	15 (2) A	30 W
-10 to +50 °C	11100.0-01	11101.0-01	10 (2) A	15 (2) A	30 W
+20 to +80 °C	11100.0-02	11101.0-02	3 (2) A	3 (2) A	30 W

** The level of switching current has an influence on the tolerance accuracy.