


SL 025

ENCLOSURE LIGHTS

The SL 025 light was designed to fit in tight spaces in enclosures. It features an optional integrated receptacle so that electrical devices (e.g. power tools) can be easily plugged in when needed. The standard light can be screw mounted in a variety of positions, or the light can be fitted with an available magnet mount.

Power Consumption	11 W
Luminosity	510 Lm (~ 45 W incandescent bulb)
Lamp Type	compact fluorescent, 2G7 base, electronic ballast
Service Life	10,000 hrs.
Switch (For Light Only)	on/off switch
Connection	3-pole terminal AWG 16 max. (2.5 mm ²) with strain relief only (cable not included), clamping torque 0.8 Nm max.
Mounting	M5 screws (not included), 11.8" (300 mm) hole distance or optional attached magnet
Housing	plastic, UL 94V-0, light grey
Operating/Storage Temperature	-4 to +122 °F / -49 to +158 °F
Operating/Storage Humidity	max. 90 % RH (non-condensing)
Protection Type	IP20
Dimensions	13.6 x 3.6 x 1.6"
Weight	approx. 0.9 lbs. (400 g), 1.3 lbs (600 g) with magnet

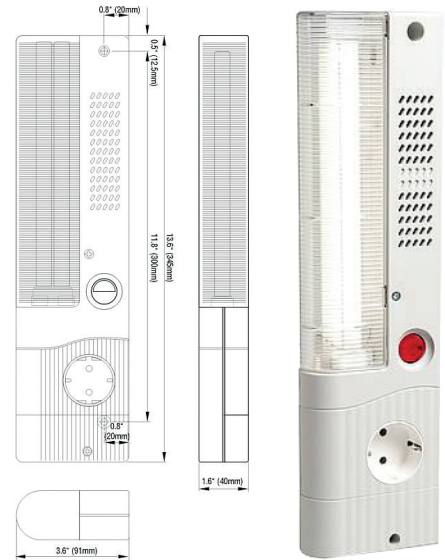

Dimensioned Drawings.

- Compact design
- Electronic ballast
- Optional integrated receptacle
- Screw or magnet mount
- Long-life energy saving lamp
- On/off switch



Part No. with On/Off Switch	Model	Operating Voltage	Protection Class	Approvals
02527.0-00	without magnet	AC 230 V, 50/60 Hz	II (double insulated)	UL File No. E234324 / VDE / EAC
02527.1-00	with magnet	AC 230 V, 50/60 Hz	II (double insulated)	UL File No. E234324 / VDE / EAC
02527.1-10	with magnet	AC 120 V, 50/60 Hz	II (double insulated)	UL File No. E234324 / EAC