


AIR TO AIR HEAT EXCHANGER | 71.6 WATTS/°C (40 WATTS/°F) INDOOR/OUTDOOR, UL TYPES 12, 4 & 4X AVAILABLE

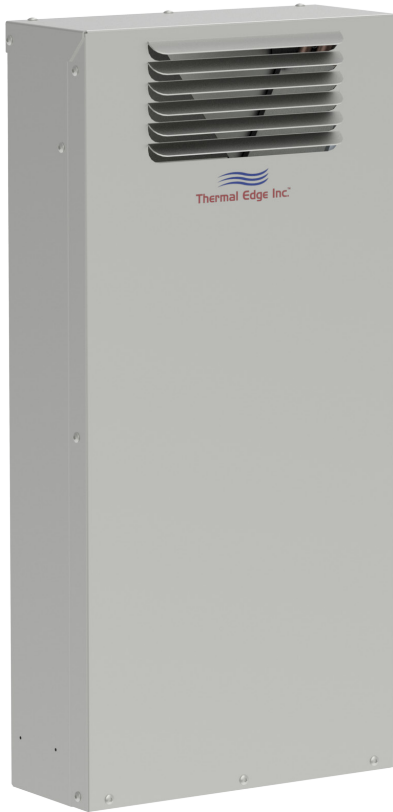

Advantages

- Industry leading 5-Year Workmanship Warranty
- High efficiency heat pipe design
- Standard units include on/off switch
- NEMA Type 12, 4 & 4X
- Coated coils standard on all units
- 115VAC, 230VAC, 24VDC & 48VDC
- Needs no filter
- UL Listed for standard & hazardous location
- Equipment tested to perform and built to last
- Units designed with our customers' applications and environments in mind


OPTIONS:

- Hazardous Location Class 1, Div 2, Groups A,B,C,D (XJX)



Model	UL Type	Material	Voltage/Hz.	Running Amps	Watts	Max. Op. Temp.	H x W x D	Weight (lbs.) Unit/Ship
A2AT26012012	12	Powder coated steel	115/50-60	0.47	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT26012004	4	Powder coated steel	115/50-60	0.47	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT2601204X	4X	Stainless steel	115/50-60	0.47	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT26023012	12	Powder coated steel	230/50-60	0.24	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT26023004	4	Powder coated steel	230/50-60	0.24	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT2602304X	4X	Stainless steel	230/50-60	0.24	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT260D2412	12	Powder coated steel	24VDC	1.94	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT260D2404	4	Powder coated steel	24VDC	1.94	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT260D244X	4X	Stainless steel	24VDC	1.94	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT260D4812	12	Powder coated steel	48VDC	0.96	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT260D4804	4	Powder coated steel	48VDC	0.96	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36
A2AT260D484X	4X	Stainless steel	48VDC	0.96	71.6°C (40°F)	160°F	29" x 13.88" x 5.5"	34 / 36

TALL SERIES DRAWINGS

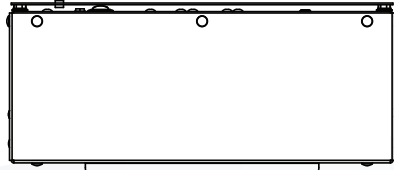

TOP VIEW

