

2000 BTUH | INDOOR/OUTDOOR, UL TYPES 12, 4 & 4X AVAILABLE

Engineered & manufactured to endure the most difficult of environments and applications. Thermal Edge air conditioners will exceed environmental requirements in applications like Steel, Food Processing, Petro-Chemical, Cement, Paper & Pulp and Plastics.



Digital Temperature Controller

- Programmable set point and temperature controls
- Visible Error and/or alarm messaging
- System status indication & keypad lockout function

Active Condensate Evaporation System

- Constant elimination of condensate
- Increases unit efficiency by pre-cooling refrigerant

Key Design Features

- Sloped top to allow for water runoff
- Designed with rigid chassis and seam welded shroud
- Thoughtful interior design for easy maintenance
- Narrow body style fits on 10" deep enclosure

Unit Efficiency

- Highly efficient rotary compressor
- Fully insulated & sealed cabinet
- Thermal Expansion Valve to maintain cooling capacity over a broad ambient temperature range

Compressor Protection System



- High & Low refrigerant cutouts with fault indication
- Compressor anti short cycle protection
- Thermal overload protector
- Compressor run capacitors reduce power inrush, save energy and increase compressor life

OPTIONS:

- Low/High Ambient
- Remote Controller
- Corrosion Protection
- Redundant System
- Controller Programming
- Open Door Kill Switch
- Remote Control/Monitor
- Extended Temp. Probe
- Heater
- Dry Contact
- Hazardous Location
- Filter/Filter Frame
- Custom Finish
- Diagnostics


Model	UL Type	BTU/Hour	Material	Voltage/ Phase/Hz.	Running Amps	Max. Amb. Temp.	H x W x D	Unit Weight (lbs.)
CS02212612	12	2000	Powder coated steel	120/1/60	3.1	131°F	20" x 10" x 10"	44
CS02212604	4	2000	Powder coated steel	120/1/60	3.1	131°F	20" x 10" x 10"	44
CS0221264X	4X	2000	Stainless Steel	120/1/60	3.1	131°F	20" x 10" x 10"	44
CS0221264XL4	4X	2000	Mill finish aluminum	120/1/60	3.1	131°F	20" x 10" x 10"	34
CS02223012	12	2000	Powder coated steel	230/1/50-60	1.37	131°F	20" x 10" x 10"	49
CS02223004	4	2000	Powder coated steel	230/1/50-60	1.37	131°F	20" x 10" x 10"	49
CS0222304X	4X	2000	Stainless Steel	230/1/50-60	1.37	131°F	20" x 10" x 10"	49
CS0222304XL4	4X	2000	Mill finish aluminum	230/1/50-60	1.37	131°F	20" x 10" x 10"	39

Performance curves are linearized representations based on controlled-condition test data. Actual performance may vary.

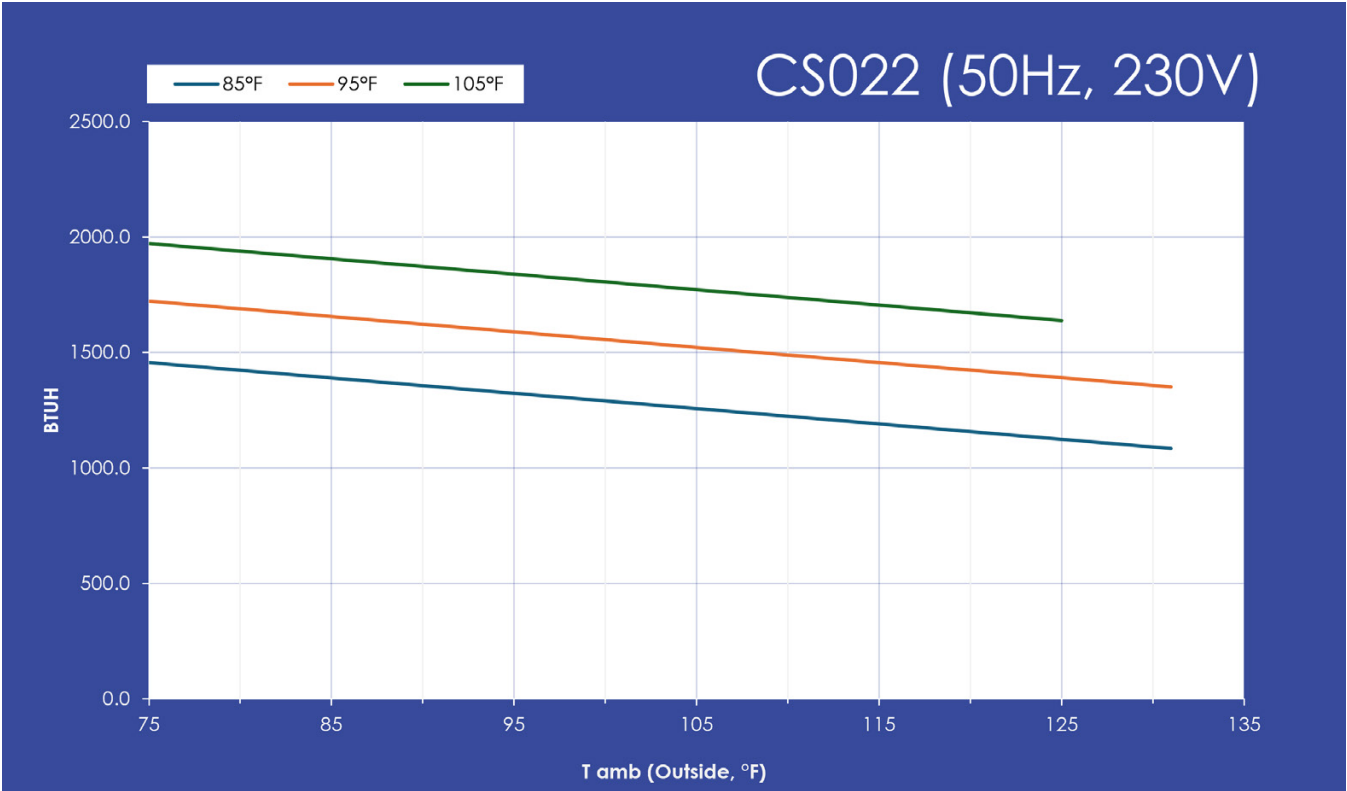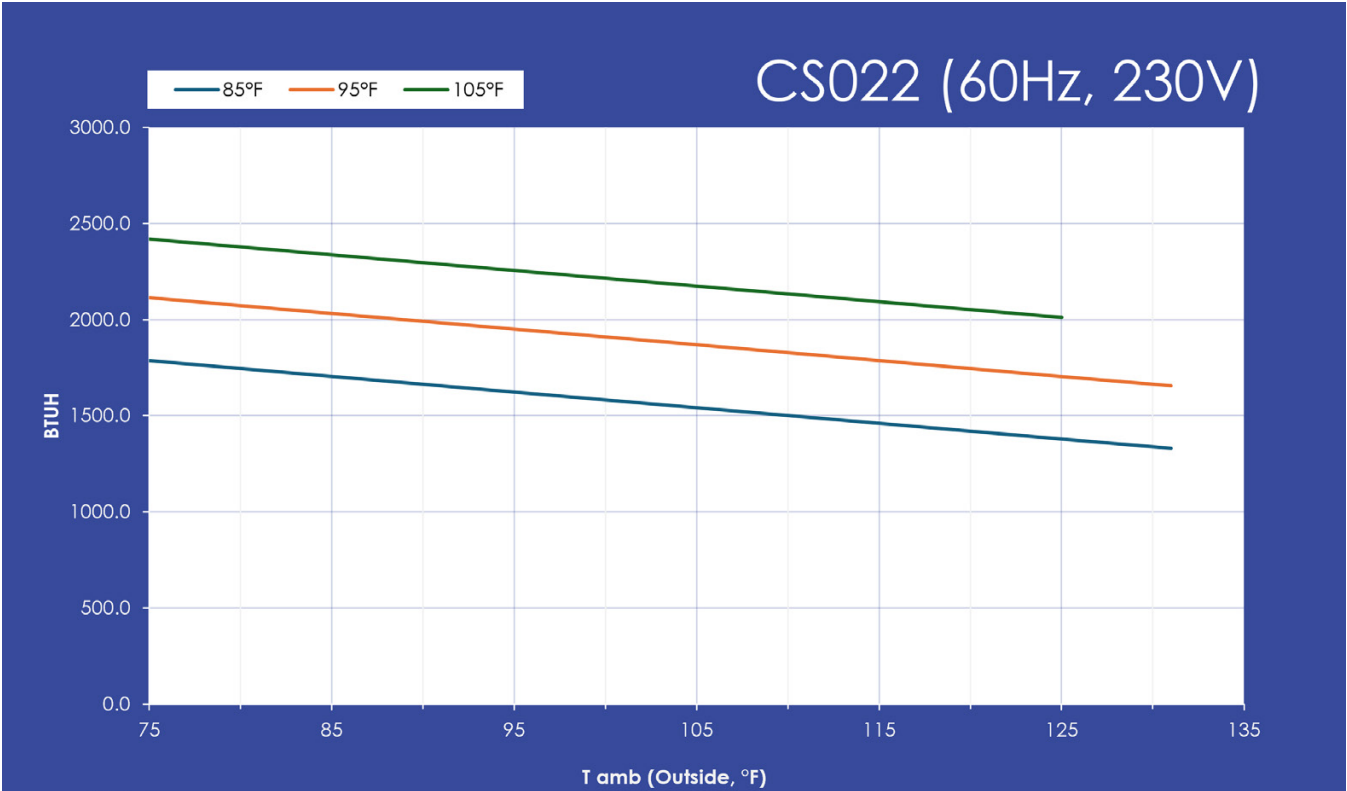

ATTENTION: If ordering a replacement for a Thermal Edge air conditioner, please include the part number and serial number of the unit being replaced in your order. This will ensure that we ship a replacement that is compatible with the cutout dimensions and power connection features of the older model. All information subject to change without notice.

Performance curves are linearized representations based on controlled-condition test data. Actual performance may vary.

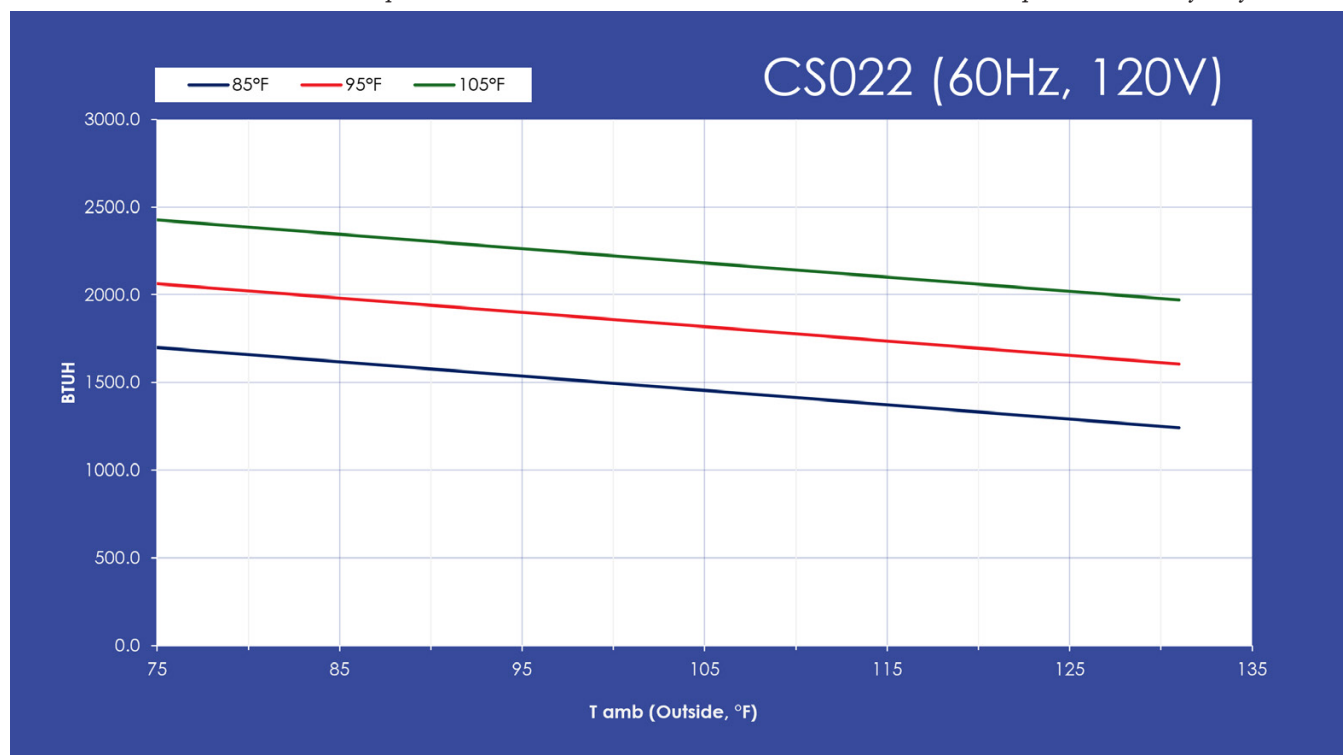

ATTENTION: If ordering a replacement for a Thermal Edge air conditioner, please include the part number and serial number of the unit being replaced in your order. This will ensure that we ship a replacement that is compatible with the cutout dimensions and power connection features of the older model. All information subject to change without notice.

CS022 DRAWING

2000 BTUH | INDOOR/OUTDOOR, UL TYPES 12, 4 & 4X AVAILABLE

TITLE		COMPACT SERIES	
2000 BTUh - 115VAC AND 230VAC		REV	
SIZE		CS022	
72 X	DWG NO	21-000008	
54			
SCALE:	WEIGHT:	SHEET 1 OF 1	

